



Site Planning Guide

Philips Ingenia 1.5T

MR30 - Mobile MRI Trailer



## O1 Introduction

O2 Mobile unit specifications
Dimension and weight
Magnetic shielding
Access to the mobile unit

Phone & Network

O3 Environmental requirements

Physical requirements

Electricity

Water

O4 Before delivery
Preparations of access route
Vehicle access requirements

05 Mobile unit layouts



### 01 Introduction


This Site Planning Guide provides information to potential customers on the preparations they would need to make so that this Mobile MRI Rental Solution can be successfully delivered, sited, and put into clinical operation.

The customer site must be prepared in accordance with the details given in this guide so that that unit and the installed medical equipment will function properly. This guide exclusively describes the unit and its siting, environmental and electrical requirements, and is meant to give outline details. Further specifications and site requirements are available upon request.

Please refer to the System Spec Sheet for specifications of the installed scanner and associated equipment, and for further details on the installed equipment.

### **02 Mobile Unit Specifications**

#### 2.1 Dimension and weight

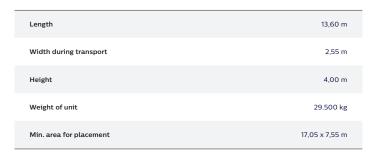

Please note: Unit has app. 17.000 kg on front legs, and 15.000 kg on back legs. When total weight is 32.000 kg, the unit has reached its maximum weight.

#### 2.2 Magnetic shielding

The mobile unit is equipped with magnetic shielding, ensuring that external disturbances outside the scan room, conforms to system standards at all times, if the minimum area for placement is respected.

#### 2.3 Access to the mobile unit

The mobile unit can be accessed, via a staircase and patient lift, both located on the front right side of the unit. The back end is also equipped with a door (leading to the back of the magnet), but this is only for service purposes. The patient lift can be used, to enable patient trolley access. The patient lift has a dimension of  $120 \times 210 \text{ cm}$  and a max capacity of 1500 kg.

#### 2.4 Phone & network

The mobile is equipped with 6 x data lines (RJ45 sockets), where 2 of the lines are dedicated telephone lines. Sockets are available in the operator room for auxiliary communication equipment such as computers, laptops or IP-telephones. The RJ45 sockets found inside the trailer must be connected to the hospitals network, via the RJ45 connectors/sockets found on the outside of the trailer (belly compartment). Please note: The connection of computers, phones and other communication equipment is the client's responsibility.




### 03 Environmental Requirements

#### 3.1 Physical requirements

- Area to be provided:  $16,50 \text{ m} \times 7,50 \text{ m} \text{ (L x W)}$
- Large moving/active metal objects e.g. cars, busses, escaladers, forklifts, trucks, transformers, helicopters, ambulances, elevators etc. should be kept at distance of min. 10 meters from magnet iso-center in order to ensure no disturbance is caused.
- A clearance of 2.5 meter is needed from side walls and back wall, otherwise the imaging can be affected by metal objects. Please see layout with clearance dimensions.
- A level (no more than 1% (0.6 degree) tilt and solid surface with a loading capacity of 32,0 tons is necessary.
- Additional reinforcements are required on unstable ground. Suitable reinforcement could be concrete, road surfacing or pavement (bound material).
- Additional space for patient trolley access and staircase must be secured around the unit for optimal access (see drawings).
- If any high voltage electrical installations are found nearby the requested location, this may interfere with magnet field. Further info can be obtained upon request.

#### 3.2 Electricity

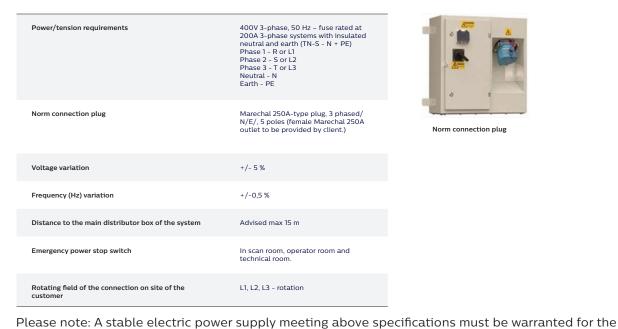



Norm connection plug

whole rental. Cable protective ramps is client responsible if trafic is passing the cable.

#### 3.3 Water

The trailer is equipped with a water tank for supply of the humidifier on board. This can be filled via the filler cap or connected to shore line, via a GK / hose size 19 x 3 mm. Water tank and connection point is located on the right side of the mobile, see position on layout. Please note: The supply with fresh water as well as the disposal of the foul water is in the client's responsibility.



## **04 Before Delivery**


#### 4.1 Preparations of access route

- The route to the installation location has to be trafficable for the tractor and unit with reference to the below "Vehicle access requirements". An engineer or project manager from AGITO Medical A/S can be consulted on placement and access.
- All obstacles, parked cars, low branches or other potential non-conformities to a failure-free access, are to be removed prior to delivery.
- AGITO Medical will provide a project manager or engineer, for consulting during planning regarding placement.
- If a site visit is requested by the customer, AGITO Medical reserves the right to invoice this expense separately.

Please note: An AGITO Project Manager will be made available for a site survey & consultation prior to rental and unit delivery. They will advise customer on the siting & placement of the unit and access requirements etc. The customer is then responsible for all necessary preparations as advised by the AGITO Project Manager.

#### 4.2 Vehicle access requirements

The access way must have a minimum width of 7,2 m. The radius of the turning circle should have an outer radius of 12,5 m. and an inner radius of 5,3 m.

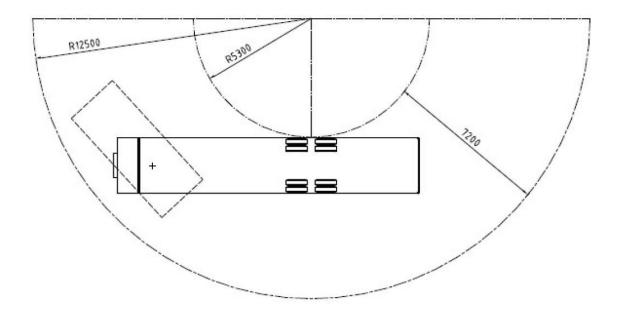



# **05 Mobile Unit Layouts**

#### 5.1 Mobile unit layouts

Width of scan room door from control room 800mm.

